


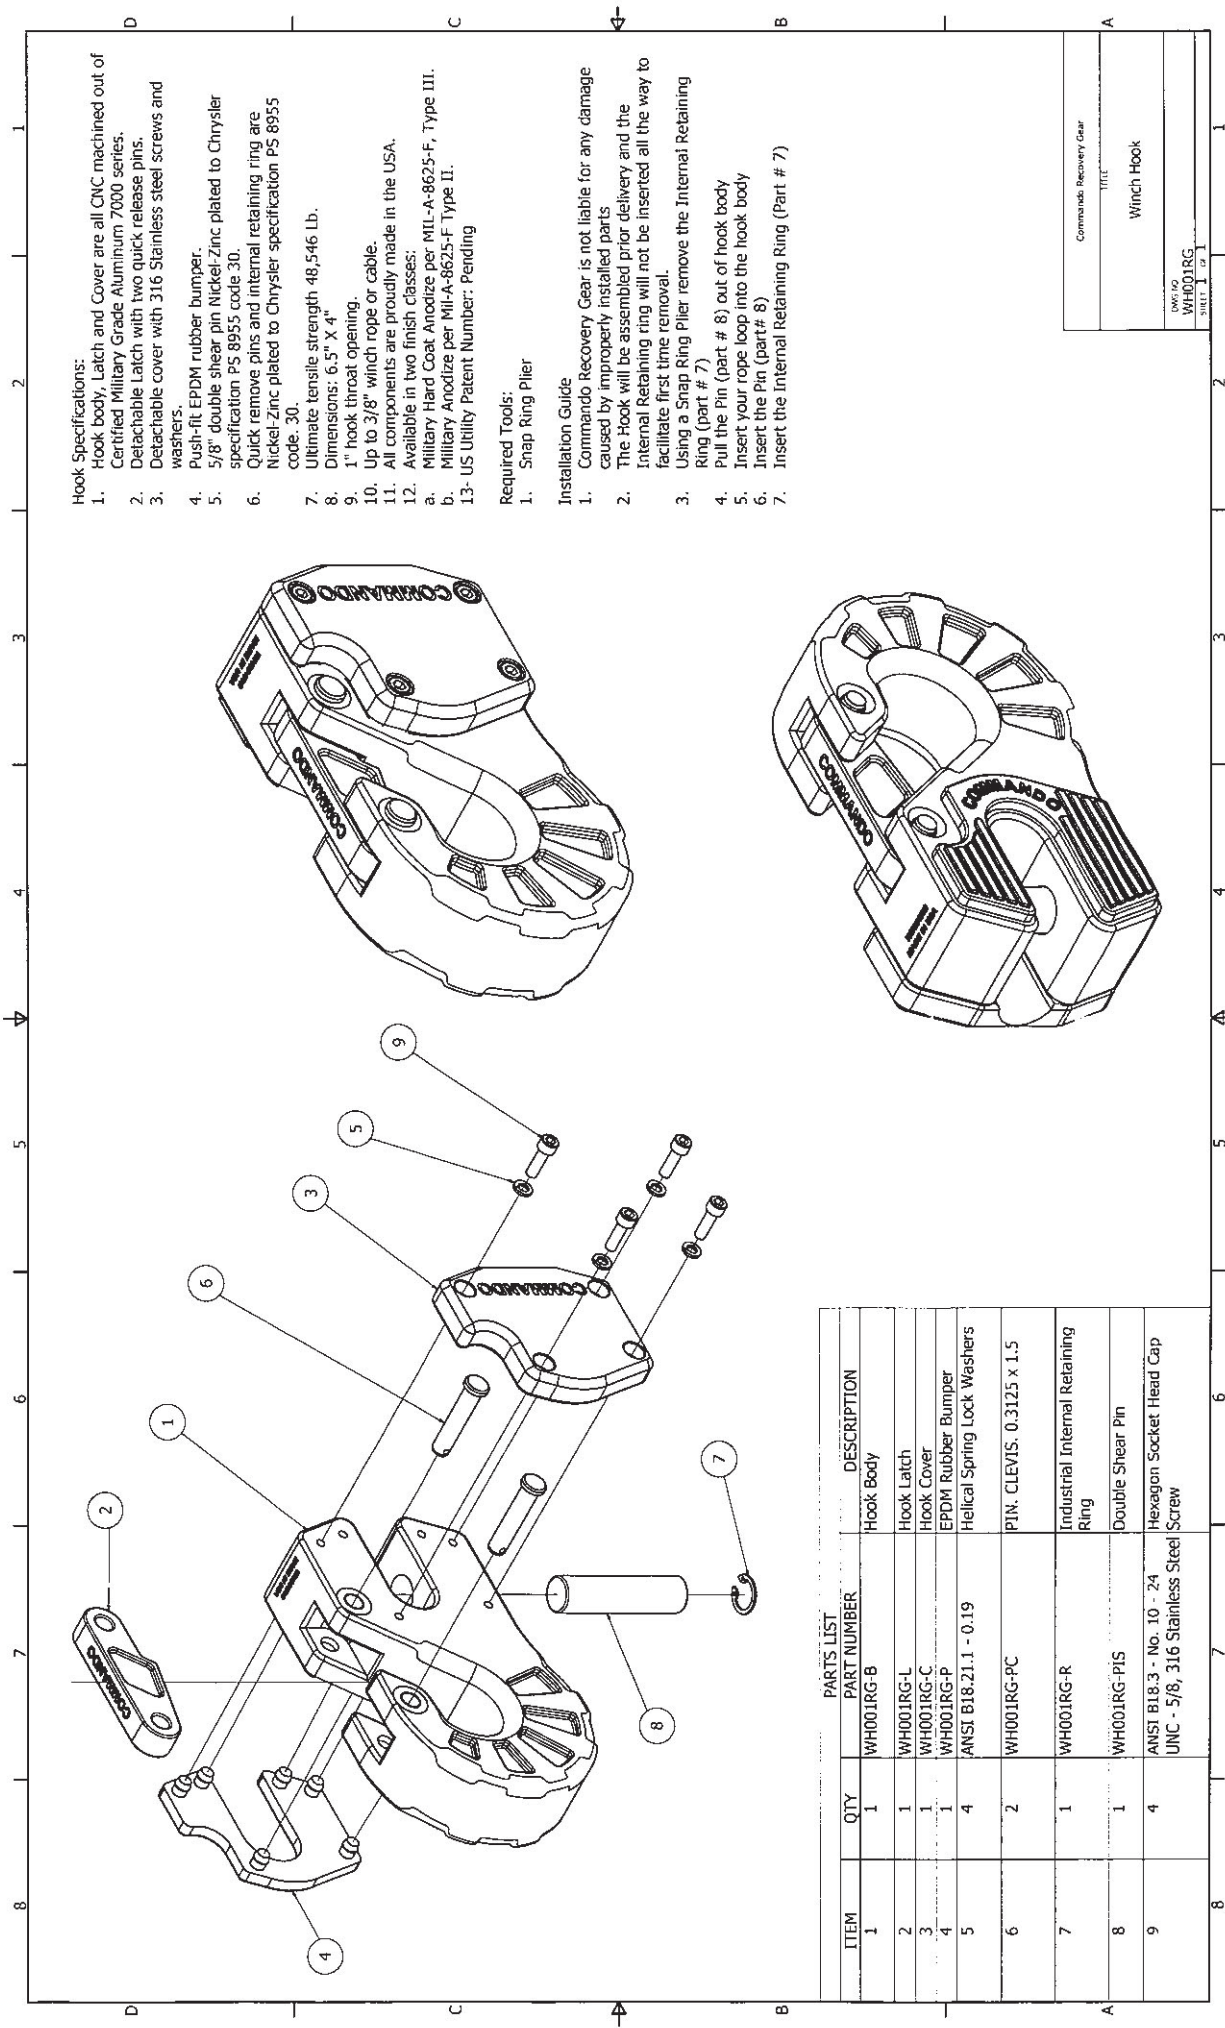

Hook Specifications:

1. Hook body, Latch and Cover are all CNC machined out of Certified Military Grade Aluminum 7000 series.
2. Detachable Latch with two quick release pins.
3. Detachable cover with 316 Stainless steel screws and washers.
4. Push-fit EPDM rubber bumper.
5. 5/8" double shear pin Nickel-Zinc plated to Chrysler specification PS 8955 code 30.
6. Quick remove pins and internal retaining ring are Nickel-Zinc plated to Chrysler specification PS 8955 code 30.
7. Ultimate tensile strength 48,546 Lb.
8. Dimensions: 6.5" X 4"
9. 1" hook throat opening.
10. Up to 3/8" winch rope or cable.
11. All components are proudly made in the USA.
12. Available in two finish classes:
 - a. Military Hard Coat Anodize per MIL-A-8625-F, Type III.
 - b. Military Anodize per MIL-A-8625-F Type II.
13. US Utility Patent Number: Pending

Required Tools:

1. Snap Ring Plier

Installation Guide

1. Commando Recovery Gear is not liable for any damage caused by improperly installed parts
2. The Hook will be assembled prior delivery and the Internal Retaining ring will not be inserted all the way to facilitate first time removal.
3. Using a Snap Ring Plier remove the Internal Retaining Ring (part # 7)
4. Pull the Pin (part # 8) out of hook body
5. Insert your rope loop into the hook body
6. Insert the Pin (part# 8)
7. Insert the Internal Retaining Ring (Part # 7)

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	WH001RG-B	Hook Body
2	1	WH001RG-L	Hook Latch
3	1	WH001RG-C	Hook Cover
4	1	WH001RG-P	EPDM Rubber Bumper
5	4	ANSI B18.21.1 - 0.19	Helical Spring Lock Washers
6	2	WH001RG-PC	PIN: CLEVIS, 0.3125 x 1.5
7	1	WH001RG-R	Industrial Internal Retaining Ring
8	1	WH001RG-PIS	Double Shear Pin
9	4	ANSI B18.3 - No. 10 - 24 UNC - 5/8, 316 Stainless Steel	Hexagon Socket Head Cap Screw

Commando Recovery Gear	1
Winch Hook	1
UW100	1
WH001RG	1
Sheet 1 of 1	