

# MAXIMUS-3



JT GLADIATOR/JLU WRANGLER

## **AIR COMPRESSOR SWITCH PANEL** (ONBOARD AIR SYSTEM)

PART #: JT4026SP

### INSTALLATION GUIDES

PLEASE MAKE SURE YOU READ AND UNDERSTAND THE ENTIRE INSTALLATION GUIDE BEFORE YOU START. WE EXPECT YOU TO HAVE BASIC MECHANICAL ABILITIES TO PERFORM THIS INSTALLATION.

WE RECOMMEND THAT YOU SEPARATE AND IDENTIFY ALL THE PARTS AND HARDWARE KITS YOU RECEIVED WITH YOUR SHIPMENT BEFORE YOU PROCEED.



## **IMPORTANT**

Follow these instructions precisely. Maximus-3 is not liable for any damage caused by improperly installed products. It is the purchaser's responsibility to ensure both the installation and maintenance are performed properly as set forth in this guide.

**Component List:****Qty**

Switch Panel (Switch/Chuck/Gauge) Panel  
Air Filter Relocation Bracket

1  
1

**Tools Required:**

- ✓ Basic Hand Tools
- ✓ Metric Sockets/Wrenches

**Hardware Kits:**

Switch Panel to Vehicle


M6 x 25 flanged Hex Bolts – Zinc

2

**Air Filter Bracket to Vehicle:**

M6 x 25 flanged Hex Bolts – Zinc




2

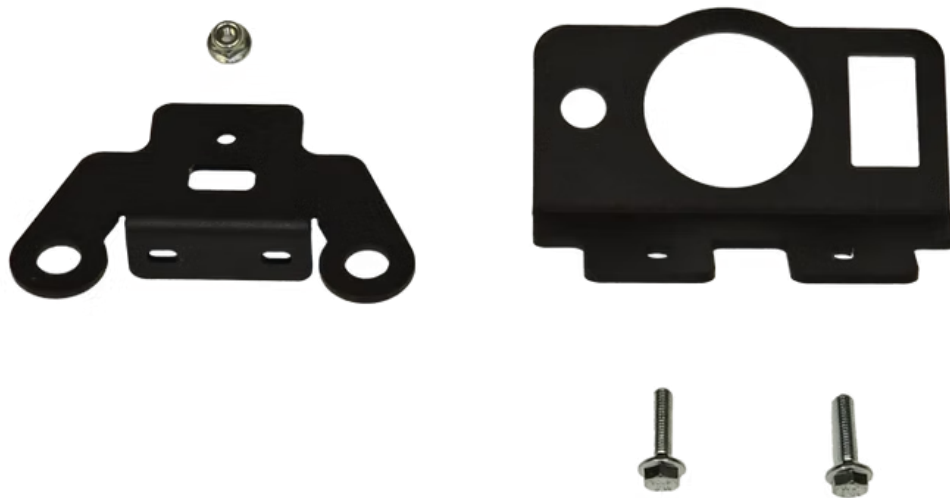

# INSTALLATION STEPS

Estimated Install Time: 1 Hour

- 1- Install your Maximus-3 Switch Panel and Air Filters relocation Brackets to existing mounting points under the hood using M6 bolts supplied. Refer to pictures below.
- 2- Route your wiring and air hoses to the front and up under the hood on the driver side by brake booster area.
- 3- Wire and connect your air hoses following the wiring diagrams and instructions provided by VIAIR or your compressor and switch manufacturer.
- 4- Use your judgment and secure your wires and hoses with cable ties away from any moving parts.

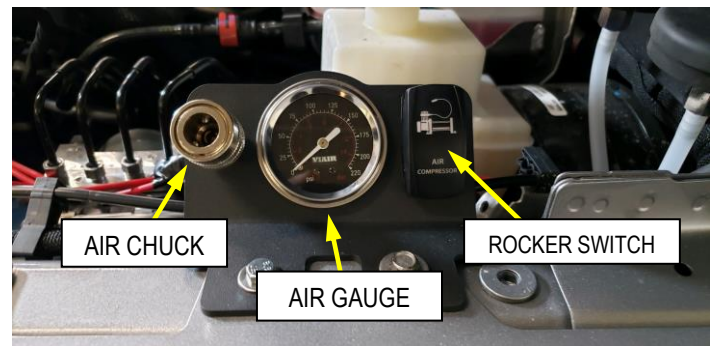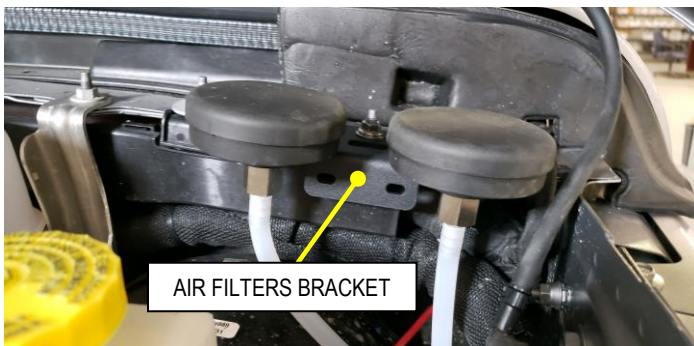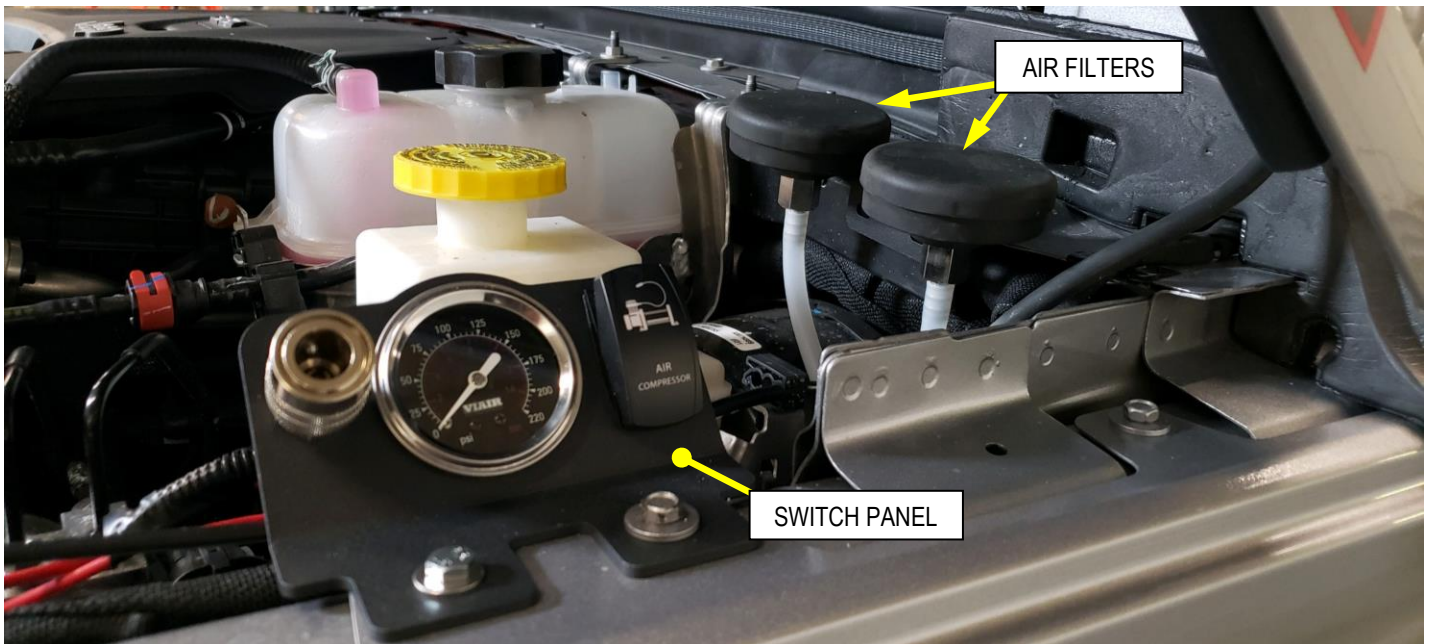

Your installation is complete. If you have questions regarding this installation, please contact us at [sales@maximus-3.com](mailto:sales@maximus-3.com) or call 248-821-6654.