

MAXIMUS-3



JK WRANGLER

DRL/MARKER LIGHTS

(Fits JK Wrangler with OEM/Factory Hard Rock Edition Steel Bumper)

PART #: HR1039ML

INSTALLATION STEPS

Estimated Install Time: 30 - 45 Minutes

PLEASE MAKE SURE YOU READ AND UNDERSTAND THE ENTIRE INSTALLATION GUIDE BEFORE YOU START. WE EXPECT YOU TO HAVE BASIC MECHANICAL ABILITIES TO PERFORM THIS INSTALLATION.

WE RECOMMEND THAT YOU SEPARATE AND IDENTIFY ALL THE PARTS AND HARDWARE KITS YOU RECEIVED WITH YOUR SHIPMENT BEFORE YOU PROCEED.



IMPORTANT

Follow these instructions precisely. Maximus-3 is not liable for any damage caused by improperly installed products. It is the purchaser's responsibility to ensure both the installation and maintenance are performed properly as set forth in this guide. We recommend using anti-size paste on all non-thread lock bolts.

Parts List

Marker Lights LHS & RHS
Wiring Kit

Qty

1
1


Tools Required

- ✓ Your Basic Hand tools
- ✓ Torx Bit #T30



INSTALLATION STEPS

1. Bolt your Maximus-3 Marker Lights onto the bumper ends as shown below using factory bolts, do not tighten for now.
 - Please note the difference between LHS and RHS light.
2. Insert the wire cable ties between the sheet metals as shown then tighten the bolts to pinch the cable secured along the back edge of the bumper. Refer to the picture below.
3. Connect the lights and route the wires through/behind the bumper and up to under the hood area.

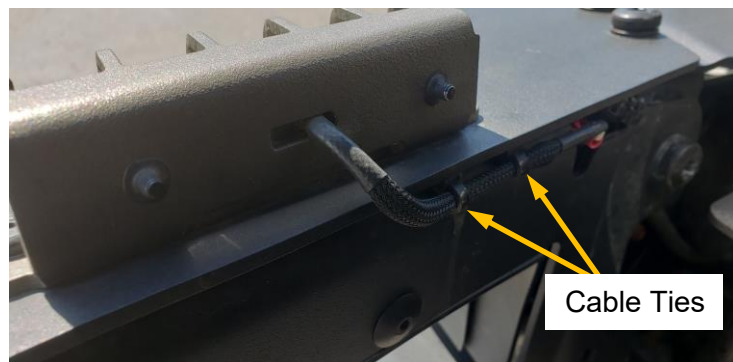


A. Without Pulsing/Flashing Module:

Ground the black ring terminal of the wiring to a good ground bolt on the vehicle and connect the red wire to your switch pod or power distribution system.

B. With Pulsing/Flashing Module:

- Connect the pulsing module to the end of your wire as shown below.
- Ground the two black ring terminals together to a good ground bolt on the vehicle and connect the red wire to your switch pod or power distribution system.

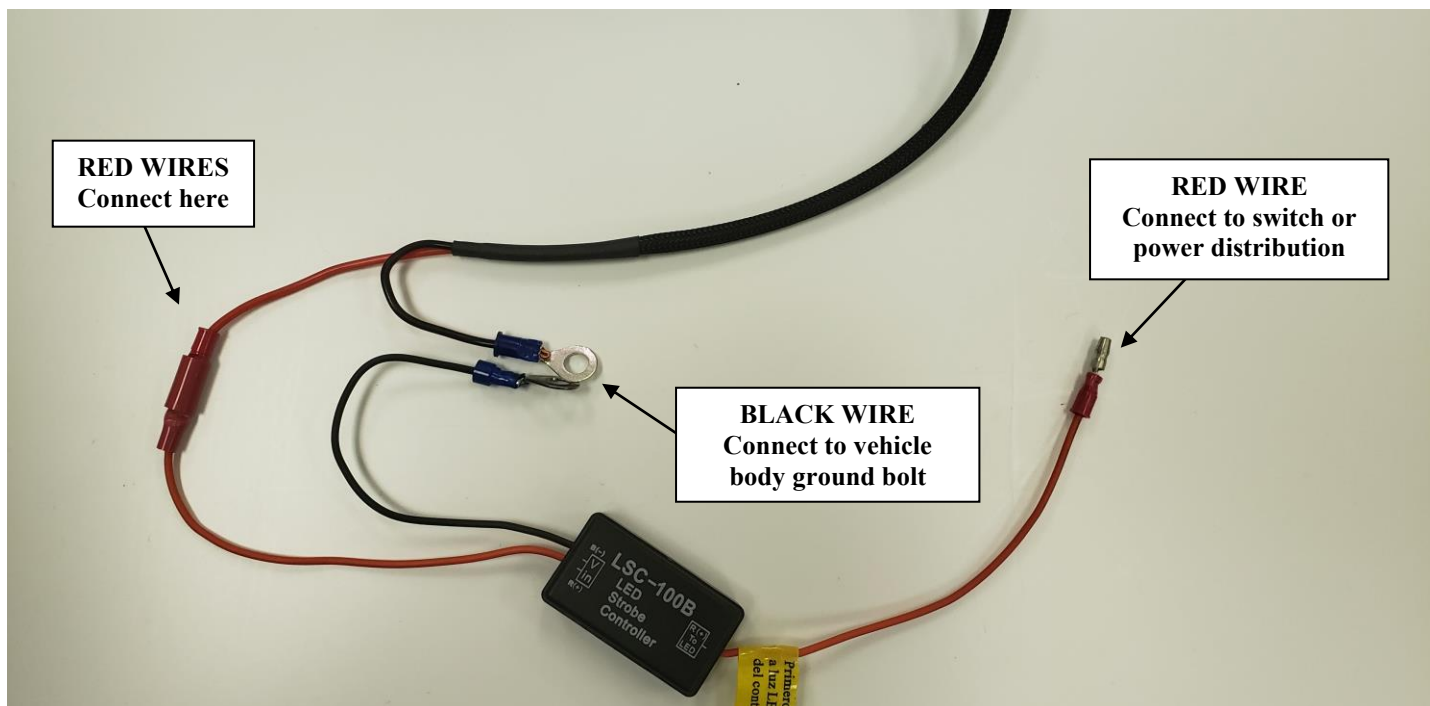

C. Dual Mode, with and Without Pulsing:

- Bypass the pulsing module using a second wire to connect to a second switch or you can use a 3-position (ON-OFF-ON) switch to control the two lighting modes.

Your installation is complete. If you have questions regarding this installation, please contact us at customerservice@maximus-3.com, or call 248-6061745