

MAXIMUS-3

★ ★ ★

UNIVERSAL FIT

CHANNEL TRACK HI-LIFT JACK MOUNT

(Fits any t-slot channel tracks, deck planks or custom flat surface)

PART #: UN4021JM

INSTALLATION GUIDES

Estimated Install Time: 15 minutes

PLEASE MAKE SURE YOU READ AND UNDERSTAND THE ENTIRE INSTALLATION GUIDE BEFORE YOU START. WE EXPECT YOU TO HAVE BASIC MECHANICAL ABILITIES TO PERFORM THIS INSTALLATION.

WE RECOMMEND THAT YOU SEPARATE AND IDENTIFY ALL THE PARTS AND HARDWARE KITS YOU RECEIVED WITH YOUR SHIPMENT BEFORE YOU PROCEED.



IMPORTANT

Follow these instructions precisely. Maximus-3 is not liable for any damage caused by improperly installed products. It is the purchaser's responsibility to ensure both the installation and maintenance are performed properly as set forth in this guide. We recommend using anti-size paste on all non-thread lock bolts.

Parts List

Hi-Lift Jack Mount Brackets

Qty

2

Tools Required

- ✓ Your basic hand tools
- ✓ 13 MM Socket/wrench

Hardware Component List

M8 x 16 Flange Hex Bolt – Zinc

4

M8 x Channel Nuts – Zinc

4

M10 x 45 Carriage Bolt – Zinc Yellow

2

M10 Thumb Nut (Turn Knob)

2

M10 x 25 Flat Washer – Zinc Yellow


2

M10 Jam Nut – Zinc Yellow

2

M10 x 20 Flat Washer - Zinc Yellow

2

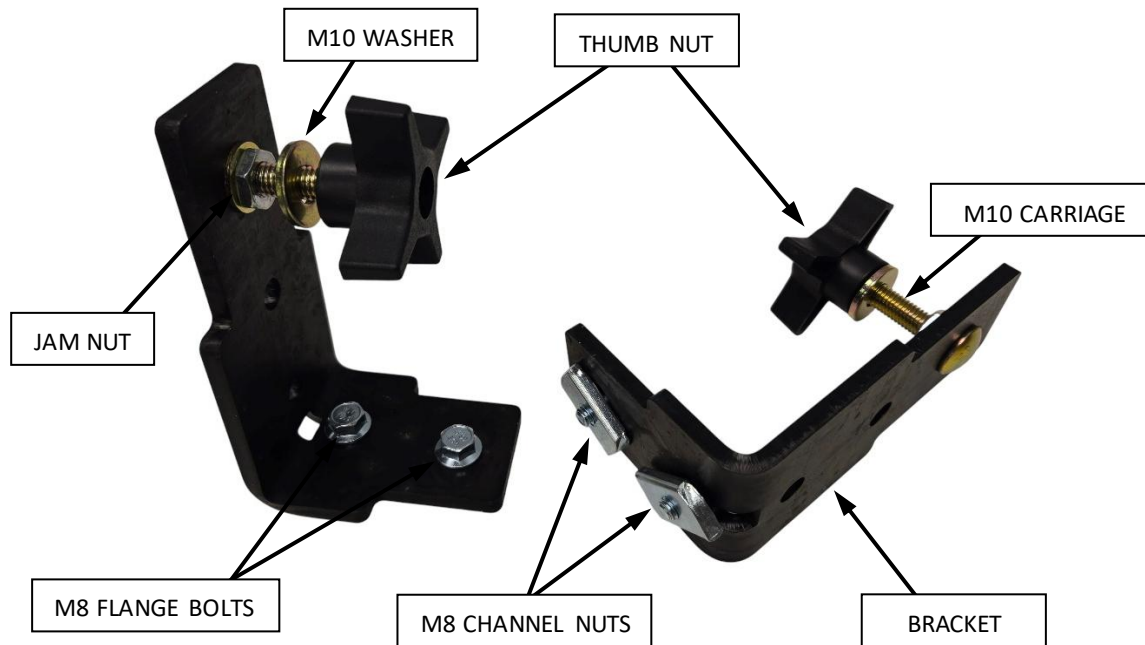

INSTALLATION STEPS

These Hi-Lift Jack Mount Brackets are intended for use with any T-slotted channel tracks such as on roof racks, crossbars and cargo decks with channel tracks or custom fit on any supportive flat surface by drilling new mounting holes. Make sure the brackets are spaced reasonably apart to evenly support the load.


1. DECIDE ON THE ORIENTATION YOU WANT YOUR JACK:

The brackets can be installed along one plank track or across two (2) planks/tracks. Refer to pictures below.

2. BOLT YOUR MAXIMUS-3 HI-LIFT JACK MOUNT BRACKETS ONTO THE PLANKS:

Slide your Maximus-3 brackets into the planks/tracks and using 13MM socket/wrench bolt them onto the planks with the M8 flange bolts and channel nuts supplied as shown below. Adjust the distance between the two brackets to match the corresponding mounting holes in the jack and tighten all four (4) bolts.

- Make sure the brackets are oriented correctly relative to each other.

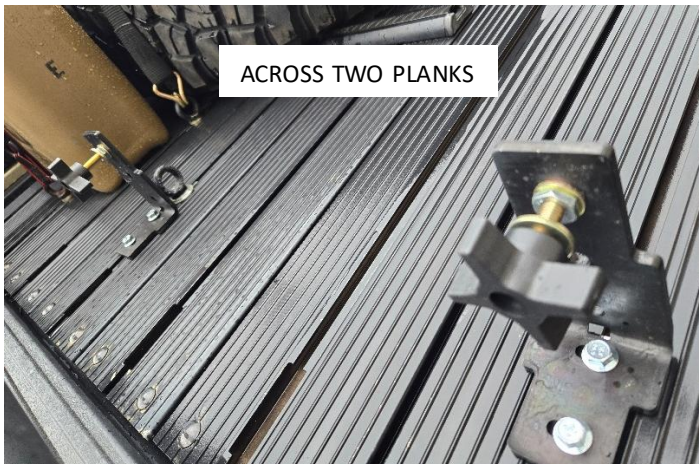



ACROSS TWO PLANKS



ALONG ONE PLANK/TRACK

3. INSTALL YOUR HI-LIFT JACK:

- A. Remove the thumb nuts and washers from the brackets.
 - B. Place the jack onto the brackets through the two mounting studs as shown below.
 - C. Lock the jack in place with the washers and thumb screws.
- Make sure the thumb screws are fully threaded on and tightened before you drive off.

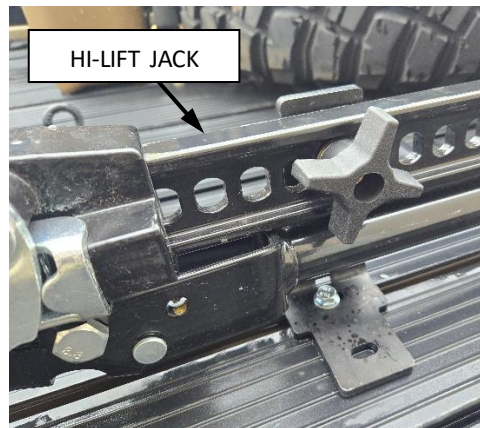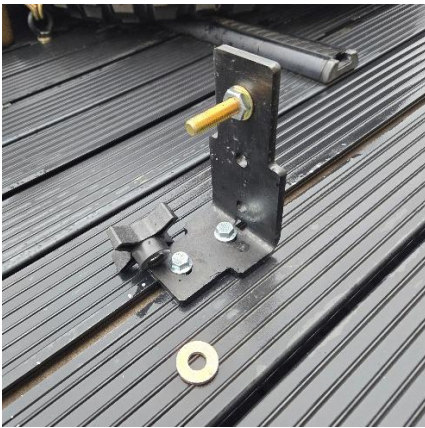

Please remember to check that M10 thumb nuts are tightened before driving.

Your installation is complete. If you have questions regarding this installation, please contact us at customerservice@maximus-3.com, or call 248-6061745

WARNING

We offer a **Limited Warranty** on products engineered and manufactured by **MAXIMUS-3**.

Our **Warranty** covers all workmanship, material, and paint/finish defects for a period of 1 year (12 months) from the time of initial purchase.

All Maximus-3 aftermarket products and components must be installed as the manufacturer instructs. Maximus-3, LLC will not be responsible for any modification, improper installation, alteration, tampering, neglect, abuse or misuse of our products. Only use Maximus-3 installation guide to add, alter, or fabricate factory parts to incorporate Maximus-3 products. We will be happy to answer any questions concerning the design, function, and correct use of our products by calling 248-821-6654. It is ultimately the user's responsibility to have all fasteners properly retorqued after the first 100 miles and then every 3,000 miles thereafter. Tire carrier must be inspected for looseness every 1,000 miles. Using your vehicle off-road will put extreme stress on the vehicle and components. After driving off-road, always check for damage and wear to components, accessories, and equipment. Completely inspect your vehicle including wheels, tires, tire carrier, roof rack, and front set up. Check all threaded fasteners for looseness. Re-torque if necessary to the required specifications. Check and remove any accumulated dirt, mud rock, or debris to preserve powder coat finish/rust prevention.

MAXIMUS-3 provides detailed installation instructions for every product. It is the responsibility of the purchaser/installer to ensure these instructions are followed properly. MAXIMUS-3 will not be responsible for damage caused by misuse, altered, or improperly installed products. MAXIMUS-3 will not cover paint or labor costs for damaged items. The warranty is not transferable and covers all items ordered on or after December 1, 2012, with a valid original receipt. The warranty covers all components manufactured by MAXIMUS-3 unless otherwise specified on individual product listings.

3-Year Manufacturer Warranty

Maximus-3 products are warranted to be free from structural defects. All metallic components will carry a 3-year manufacturer structural warranty. All warranty claims shall be issued in replacement of the original part or in-store credit. No refunds will be issued in cash, check or credit card payments.

ANY PACKAGES BEING SENT/RETURNED TO MAXIMUS-3 WITHOUT RETURN MERCHANDISE AUTHORIZATION (RMA) NUMBERS WILL BE REFUSED AND RETURNED TO SENDER.

RETURN POLICY

(Procedures for Returning or Exchanging Products)

PRODUCT MUST BE RETURNED TO THE ORIGINAL PLACE OF PURCHASE – Please refer to your original invoice.

Returns and Exchanges

At MAXIMUS-3, we strive to get your order to you complete, undamaged, and 100% correct. Your satisfaction is guaranteed. Products can be returned within 15 days of shipment if they are unused, uninstalled, unpainted, and in new and saleable condition. Returned products need to be in their original packaging with all parts and instructions included. All returns of non-defective, non-damaged, or special-order parts are subject to a 15% restocking fee unless we made an error.

All returns require a "Return Merchandise Authorization" (RMA) number from MAXIMUS-3 or one of our Distributors.

Whether we have made an error, you wish to exchange something, or there is a warranty claim, an RMA number is required. This number must be written on the outside of the returned package. Please allow five (5) business days for refunds to appear on your credit card statement. **No returns will be accepted on modified "Custom" or "Special Order" items.** Item(s) must be received within 30 days of the RMA issue date; otherwise, the Return Merchandise Authorization will be voided.

Damaged Merchandise

Upon receiving your order, open the carton(s) and thoroughly inspect the contents. If any package arrives and shows signs of external damage, you may choose not to accept it. You may refuse it and require your seller to advise you of their procedure to follow. If there was damage during shipment, contact us so that a claim can be filed. Please keep all packaging materials should the carrier wish to inspect them.

Truck Freight Shipments

It is imperative to make a note of any damage on the delivery receipt at the time of delivery. **Open and inspect** the merchandise carefully **before** signing the delivery receipt. We can only initiate claims if the damage was noted at the time of delivery. Freight costs are all based on shipments to commercial addresses (with a dock), if you require shipment to a residential address, additional charges may be applied to the order total.

Products

Product specifications, availability, and pricing are all subject to change without notice. National, State, Provincial, or local laws and regulations may prohibit the removal or modification of stock vehicle components or the addition of some of our products for on-road use. It is the responsibility of the purchaser to ensure that the use of purchased products follows all laws and regulations.