

MAXIMUS-3

JT GLADIATOR

JT REAR DRIVESHAFT SPACERS

(Left Hand Drive Only)

PART #: JT5017DS

INSTALLATION GUIDES

Model Year: 2019 - Current Jeep JT Gladiator



PLEASE MAKE SURE YOU READ AND UNDERSTAND THE ENTIRE INSTALLATION GUIDE BEFORE YOU START. WE EXPECT YOU TO HAVE BASIC MECHANICAL ABILITIES TO PERFORM THIS INSTALLATION.

WE RECOMMEND THAT YOU SEPARATE AND IDENTIFY ALL THE PARTS AND HARDWARE KITS YOU RECEIVED WITH YOUR SHIPMENT BEFORE YOU PROCEED.

IMPORTANT

Follow these instructions precisely. Maximus-3 is not liable for any damage caused by improperly installed products. It is the purchaser's responsibility to ensure both the installation and maintenance are performed properly as set forth in this guide.

Parts List:

JT Rear Driveshaft Carrier Spacers
M12 Hex Bolt
M12 Flat Washer

Qty

2
2
2

Tools Required:

- Basic Hand Tools
- Metric Sockets & wrenches/spanners





INSTALLATION STEPS

Estimated Install Time: 15 Minutes

This will reduce driveshaft pinion operating angle and prevent vibrations.

1. Remove the bolts (2) holding the driveshaft bearing carrier block from frame.
2. Place the Maximus-3 carrier spacers (2) between the frame and the carrier and bolts in place the M10 bolts and washers provided, as shown in the picture below.
3. Torque the bolts to 50 lb-ft (fig. 15).

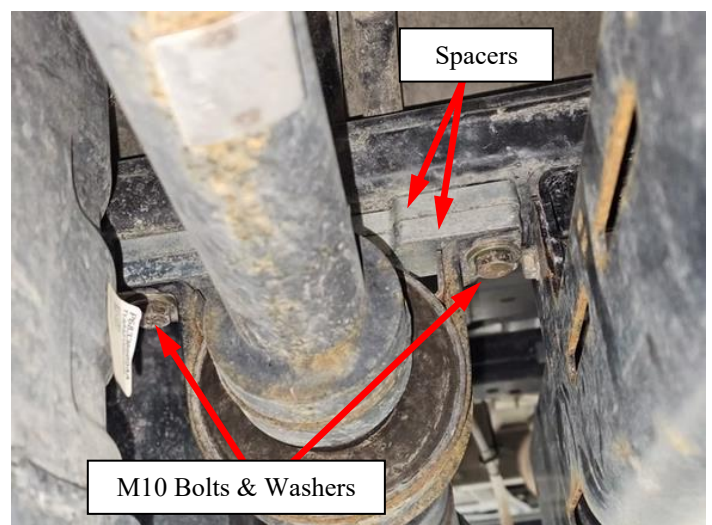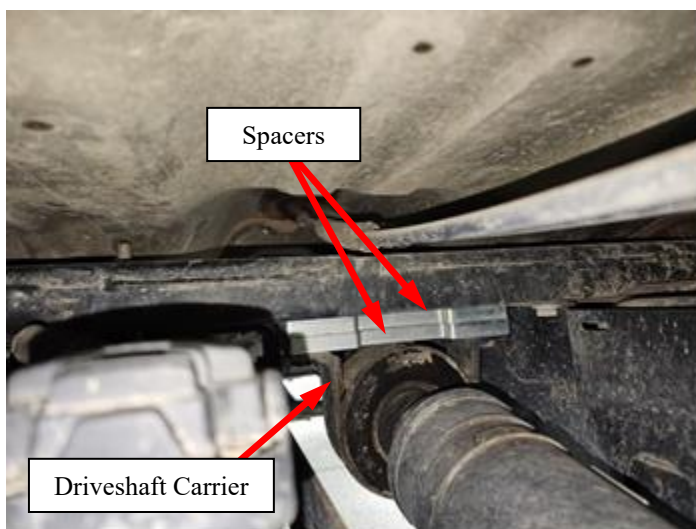

Your installation is complete. If you have questions regarding this installation, please contact us at customerservice@maximus-3.com, or call 248-6061745