

JK WRANGLER

FILLER TRIM PLATES

(Fits JK Hard Rock with OEM Factory Steel Bumper)


PART #: HR1010FZ, HR1011FS

INSTALLATION GUIDES

Estimated Install Time: 15 minutes

PLEASE MAKE SURE YOU READ AND UNDERSTAND THE ENTIRE INSTALLATION GUIDE BEFORE YOU START. WE EXPECT YOU TO HAVE BASIC MECHANICAL ABILITIES TO PERFORM THIS INSTALLATION.

WE RECOMMEND THAT YOU SEPARATE AND IDENTIFY ALL THE PARTS AND HARDWARE KITS YOU RECEIVED WITH YOUR SHIPMENT BEFORE YOU PROCEED.

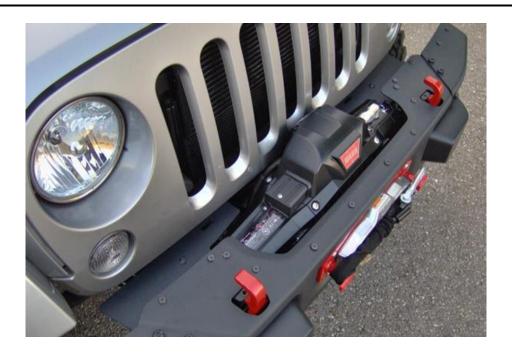

IMPORTANT

Follow these instructions precisely. Maximus-3 is not liable for any damage caused by improperly installed products. It is the purchaser's responsibility to ensure both the installation and maintenance are performed properly as set forth in this guide. We recommend using anti-size paste on all non-thread lock bolts.

Component List:	<u>Qty</u>	Tools Required:
Filler Trim Plate LHS	1	Nut-cert Gun/Tool
Filler Trim Plate RHS	1	Metric Allen Keys
M6 Rivet-nut (nut-cert)	2	OR
M6 Steel Washers – Zinc Plated	2	You will need the following tools if you do not have a nut-cert (rivet-nut) gun/tool:
M6 Truss Head Bolts - Stainless Steel	2	✓ Metric Drive Socket 10 MM, Extension and Ratchet
		✓ Small open wrench/spanner (7mm)
		✓ Long M6 bolt, 2 M6 washers (supplied with hardware kit)







WARN EVO & STANDARD BODY WINCHES

INSTALLATION STEPS

The Filler Trim Plates are to be mounted in the factory mounting holes in the chassis frame between the bumper and the grille, where the factory plastic trim was mounted. To do this you first need to set a thread into the hole in the chassis frame using a nut-cert (riv-nut) gun/tool similar to the one shown in step 1 below. If you do not have a nut-cert gun/tool, then follow the manual process as explained below.

1- INSTALL THE NUT-CERTS (RIV-NUTS)

✓ Using a nut-cert gun/tool set the 2 nut-certs provided in the factory holes in the chassis frame shown below.







Alternatively, if you do not have a nut-cert gun/tool,

Use the long M6 bolt and the 2 M6 washers provided to manually set/rivet the nut-certs in place.

- Arrange the setup shown below (bolt-washer-wrench-washer-rivnut), in that order.
- ✓ Insert it into the hole and hold down flat to the frame using the wrench as a handle then start tightening the long hex bolt using the 10mm socket, extension and ratchet until the nut-cert starts to rivet itself to the frame.
- ✓ Remove the bolt and repeat on the other side.

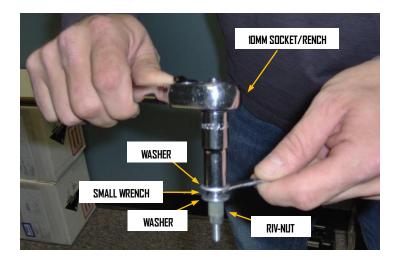







2- PREPARE THE FILLER TRIM PLATES TO FIT AROUND YOUR WINCH:

- A. Test fit the plates.
- B. For off-center winch setup, cut along the pre-cut slots on the plates as necessary to make the plates fit.

Note: No cutting is required for WARN Zeon winches and small body winches such as Smittybilt, Badland and Warn VR EVO, when installed in the centered position.

3- ASSEMBLE THE FILLER TRIM PLATES:

- A. Replace the M6 Torx bolts under the front bumper with the M6 Stainless Steel Bolts and washers supplied.
- B. Put the Filler Trim Plates on the chassis frame, line up the holes and bolt down using the Torx bolts you just removed from the bumper.

HINT: you may need to slightly bend out the anti-rotation tabs on the plates if the holes do not line up well.





Your installation is complete. If you have questions regarding this installation, please contact us at customerservice@maximus-3.com, or call 248-6061745

WARNING

We offer a Limited Warranty on products engineered and manufactured by MAXIMUS-3.

Our Warranty covers all workmanship, material, and paint/finish defects for a period of 1 year (12 months) from the time of initial purchase.

All Maximus-3 aftermarket products and components must be installed as the manufacturer instructs. Maximus-3, LLC will not be responsible for any modification, improper installation, alteration, tampering, neglect, abuse or misuse of our products. Only use Maximus-3 installation guide to add, alter, or fabricate factory parts to incorporate Maximus-3 products. We will be happy to answer any questions concerning the design, function, and correct use of our products by calling 248-821-6654. It is ultimately the user's responsibility to have all fasteners properly retorqued after the first 100 miles and then every 3,000 miles thereafter. Tire carrier must be inspected for looseness every 1,000 miles. Using your vehicle off-road will put extreme stress on the vehicle and components. After driving off-road, always check for damage and wear to components, accessories, and equipment. Completely inspect your vehicle including wheels, tires, tire carrier, roof rack, and front set up. Check all threaded fasteners for looseness. Re-torque if necessary to the required specifications. Check and remove any accumulated dirt, mud rock, or debris to preserve powder coat finish/rust prevention.

MAXIMUS-3 provides detailed installation instructions for every product. It is the responsibility of the purchaser/installer to ensure these instructions are followed properly. MAXIMUS-3 will not be responsible for damage caused by misuse, altered, or improperly installed products. MAXIMUS-3 will not cover paint or labor costs for damaged items. The warranty is not transferable and covers all items ordered on or after December 1, 2012, with a valid original receipt. The warranty covers all components manufactured by MAXIMUS-3 unless otherwise specified on individual product listings.

3-Year Manufacturer Warranty

Maximus-3 products are warranted to be free from structural defects. All metallic components will carry a 3-year manufacturer structural warranty. All warranty claims shall be issued in replacement of the original part or in-store credit. No refunds will be issued in cash, check or credit card payments.

ANY PACKAGES BEING SENT/RETURNED TO MAXIMUS-3 WITHOUT RETURN MERCHANDISE AUTHORIZATION (RMA) NUMBERS WILL BE REFUSED AND RETURNED TO SENDER.

RETURN POLICY

(Procedures for Returning or Exchanging Products)
PRODUCT MUST BE RETURNED TO THE ORIGINAL PLACE OF PURCHASE – Please refer to your original invoice.

Returns and Exchanges

At MAXIMUS-3, we strive to get your order to you complete, undamaged, and 100% correct. Your satisfaction is guaranteed. Products can be returned within 15 days of shipment if they are unused, uninstalled, unpainted, and in new and saleable condition. Returned products need to be in their original packaging with all parts and instructions included. All returns of non-defective, non-damaged, or special-order parts are subject to a 15% restocking fee unless we made an error.

All returns require a "Return Merchandise Authorization" (RMA) number from MAXIMUS-3 or one of our Distributors.

Whether we have made an error, you wish to exchange something, or there is a warranty claim, an RMA number is required. This number must be written on the outside of the returned package. Please allow five (5) business days for refunds to appear on your credit card statement. **No returns will be accepted on modified "Custom" or "Special Order" items.** Item(s) must be received within 30 days of the RMA issue date; otherwise, the Return Merchandise Authorization will be voided.

Damaged Merchandise

Upon receiving your order, open the carton(s) and thoroughly inspect the contents. If any package arrives and shows signs of external damage, you may choose not to accept it. You may refuse it and require your seller to advise you of their procedure to follow. If there was damage during shipment, contact us so that a claim can be filed. Please keep all packaging materials should the carrier wish to inspect the m.

Truck Freight Shipments

It is imperative to make a note of any damage on the delivery receipt at the time of delivery. **Open** and **inspect** the merchandise carefully **before** signing the delivery receipt. We can only initiate claims if the damage was noted at the time of delivery. Freight costs are all based on shipments to commercial addresses (with a dock), if you require shipment to a residential address, additional charges may be applied to the order total.

Products

Product specifications, availability, and pricing are all subject to change without notice. National, State, Provincial, or local laws and regulations may prohibit the removal or modification of stock vehicle components or the addition of some of our products for on-road use. It is the responsibility of the purchaser to ensure that the use of purchased products follows all laws and regulations.